



◆ Feature

- .Constant voltage design
- .Universal AC input / Full range
- .Small dimension, High efficiency, High reliability, Long lifetime
- .Ip67 design for outdoor installation
- .Working temperature: -25°C~+50°C
- .Protections: Overload, Over voltage, Short-circuit, etc.
- .Typical efficiency: 85%
- .CE\UL\IP67 certified, RoHS compliant
- .100% full load burn-in test.

SPECIFICATION


Model	Number	VF-12015D0961	VF-24015D0961		
Output	DC Voltage	12V	24V		
	Rated current	1.25A	0.63A		
	Current range	0-1.25A	0-0.63A		
	Rated power	15W	15W		
	Ripple and Noise(max.) Note4	120mVp-p	240mVp-p		
	Voltage tolerance Note3	±4%	±2%		
	Line regulation	±1%	±0.5%		
	Load regulation	±1.5%	±1.5%		
	Output groups	1	1		
	Set up time Note6	2000ms, 50ms(at full load) 110Vac/230Vac			
Holding time(Typ.)	15ms(at full load) 230Vac				
Input	Voltage range Note 2	90~305Vac or 127~432Vdc			
	Frequency range	47~63Hz			
	Power factor(Typ.)	PF≥0.50/110V(at full load) PF≥0.45/230V(at full load)			
	Efficiency(Typ.)	83.0%	85.0%		
	AC current	0.35A/110Vac 0.17A/230Vac			
	Inrush current(Typ.)	Cold start: 50A/230Vac			
	Leakage current	<0.75mA/240Vac			
Protection	Over load	104%-145% of the rated output power Protection mode: constant current limiting, recovers automatically after the load reduced.			
	Short circuit	Protection type: Hiccup mode, recovers automatically after fault conditions removed			
	Over voltage	13.5-18.0V	24.5-35.0V		
	Over temperature	100°C±10°C(RTH2) Protection type: Shut down O/P voltage, recovers automatically after temperature goes down.			
Environment	Working temperature	-25°C~+50°C			
	Working humidity	10%~90%RH, non-condensing			
	Storage temp. and humidity	-25°C~+75°C, 5%~95%RH			
	Temp. coefficient	±0.05%/°C (0~40°C)			
	Vibration	10-300Hz, 1G 10min./cycle, period for 60min. each along X, Y, Z axes			
Safe and EMC	Safety standards	Compliance to UL8750,EN61347-1, EN61347-2-13, Ip67 waterproof rating.			
	Withstand voltage	I/P-O/P: 3.75KVAC I/P-FG: 1.875KVAC O/P-FG: 0.5KVAC			
	Insulation resistance	I/P-O/P, I/P-FG, O/P-FG: 100Mohms/500Vdc 25°C/70%RH			
	EMC Emission	/			
	EMC Immunity	/			
Others	MTBF	≥200Khrs, MIL-HDBK-217F(25°C)			
	Dimension	148X27.5X25.5mm(L*W*H)			
	Packing	0.185Kg/PCS, 50PCS/9.25Kg/box, (395X215X180mm)			

NOTE


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Derating may be needed under low input voltages. Please check the static characteristics for more details.
3. Tolerance: includes set up tolerance, line regulation and load regulation.
4. Ripple & noise are measured at 20MHZ of bandwidth by using twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-confirm EMC Directive on the complete installation.
6. The start time was tested under the situation of cold star, continuous switching on/off may raise the start time.

■ Mechanical Specification

Case No. D0961 Unit: mm

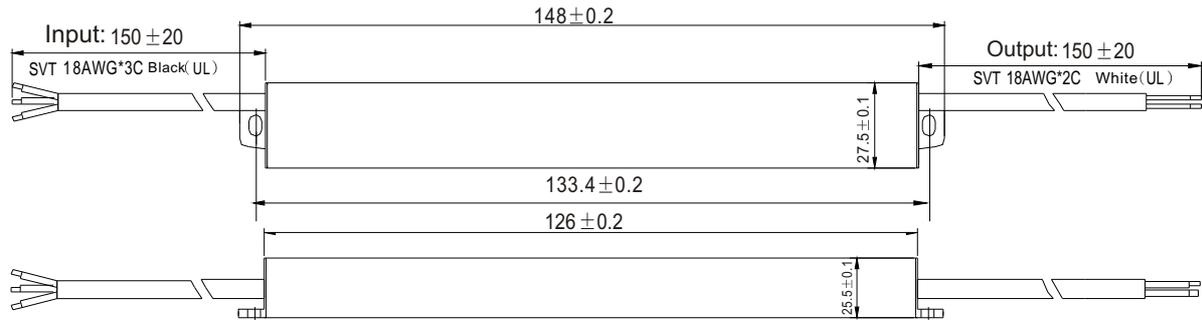

■ Derating Curve

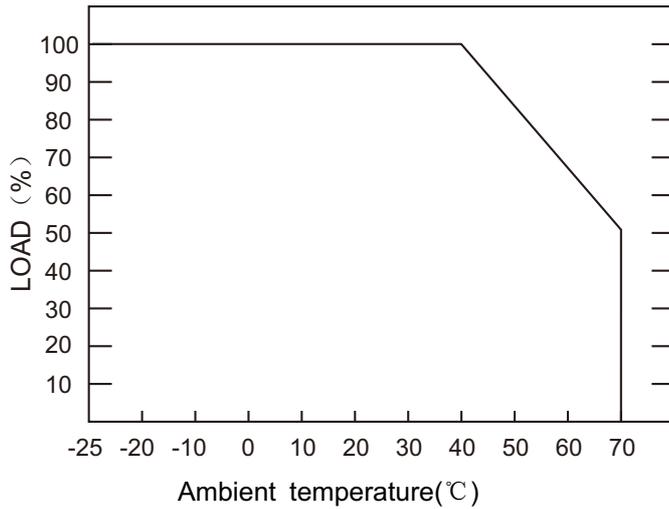

■ Static Characteristics

